



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

PCT/PTO 14 APR 2005

PC/EP 03/50722

#2

REC'D 24 DEC 2003

WIPO

PCT

10/531567

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079300.6

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1 (a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02079300.6
Demande no:

Anmeldetag:
Date of filing: 16.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

SHELL INTERNATIONALE RESEARCH
MAATSCHAPPIJ B.V.
Carel van Bylandtlaan 30
2596 HR Den Haag
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Vessel for storing particulate matter and discharge device for use in the same

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

B01J8/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

16. 10. 2002

TS 1318 EPC

(87)

CRW

Vessel for storing particulate matter and discharge
device for use in the same

The invention pertains to a vessel for storing
particulate matter, such as pulverised coal or fly ash,
comprising a main part and, at its bottom portion, at
least one discharge device, which comprises a converging,
preferably conical or substantially conical, outer shell.
and a permeable, converging inner shell positioned in the
outer shell, the discharge device being connected to the
main part by means of a first flange at or near the lower
rim of the bottom portion of the main part and a second
flange at or near the upper rim of the outer shell of the
discharge device.

Such vessels are employed inter alia for (temporary)
storage of pulverised coal and fly ash in coal
gasification plants. Coal gasification is known in the
art and involves the partial combustion of carbonaceous
materials such as coal and petroleum coke. The primary
product is syngas, a mixture of carbon monoxide and
hydrogen, which is often used to manufacture pure
hydrogen and to synthesise ammonia, methanol, oxo
chemicals and their derivatives, such as urea fertiliser
and synthetic hydrocarbon fuels. Syngas can also be used
directly as a fuel to generate heat, steam and
electricity.

US 5,129,766 (in the name of Shell Oil Company)
discloses a vessel comprising a feed hopper
(numeral 11 in figure 1) and a cone-shaped
"receiving means 7". According to US 5,129,766, it is of

particular importance in the manufacture of synthesis gas that particulate fuel is introduced to burners within the gasifier in a uniform manner. Fluctuations in the mass flow rate of coal being supplied to the burners of the gasifier are detrimental to its performance.

Figure 2 of US 5,129,766 shows a receiving means (7) which may be lined with a liner or inner shell (8) whose walls may be permeable, or porous, to gaseous fluids used for aerating the mixture of particulate solids and gas present in the receiving means. A jacket (13) surrounds the liner (8) and is mounted to form a substantially enclosed space between the walls (12) of the liner (8) and the jacket (13). As can be seen from figure 2, the receiving means (7) comprises a flange, which is connected, by means of bolts, to a flange on the bottom side of the feed hopper. The liner (8) is kept in place by clamping a flange forming the upper rim of the liner (8) between the said flanges on the receiving means (7) and the feed hopper (11).

As a result of this construction, extra leaks paths are created from the (pressurised) feed hopper to the atmosphere and small deviations in the position of the liner or the flanges may subject the liner to detrimental bending stresses, especially during bolt tightening.

It is an object of the present invention to reduce at least one of these effects.

To this end, the invention is characterised in that the inner shell is secured, preferably at or near its upper rim, to the inner wall of the outer shell of the discharge device, preferably to the inner wall of the second flange. As a result, the number of gaskets between the flanges can be reduced, preferably to a single gasket, thus reducing or avoiding additional leak paths,

and/or positioning of the inner shell becomes less critical, at least with regards to the tightening of the flanges.

5 In a preferred embodiment, the inner wall of the second flange is provided with at least one lug or a ring and the inner shell is attached to this lug or ring. Thus, there is no need for an individually designed flange adapted to accommodate the inner shell and one can use a standardised (ANSI, DIN, MSS, etc.) flange instead.
10 Individually designed flanges have to be tailor made in a forging mill, requiring dedicated tools.

The invention also pertains to a vessel for storing particulate matter, wherein the outer shell comprises, at its bottom portion, a third flange and wherein the lower
15 portion of the inner shell is cylindrical, preferably circle-cylindrical, and positioned in line with the central opening of the third flange and/or extends through this opening. Thus, the construction of the discharge device can be kept more straightforward.
20 I.e., the cylindrical lower portion can be sealed by means of a relatively simple gasket, e.g. one or more non-metal O-rings, surrounding the lower portion. Further, a standard flange can be used as the third flange and free thermal expansion of the inner shell is
25 facilitated.

Especially for vessels operating at higher temperatures, e.g. in excess of 200 °C, it is preferred that a stuffing box assembly is positioned between the cylindrical lower portion of the inner shell and the
30 outer shell. This type of sealing device will be discussed in more detail below.

The invention further pertains to a discharge device for use in a vessel for storing particulate matter, such

as pulverised coal or fly ash, comprising a converging, preferably conical or substantially conical, outer shell and a permeable, converging inner shell positioned in the outer shell, characterised in that the inner shell has been attached to the inner wall of the outer shell. As set out above, it is preferred that the device comprises a flange forming the upper rim of the outer shell and that the inner shell is attached to the inner wall of this flange.

It is noted that US 4,941,779 discloses "a vessel having downwardly converging walls at the lower end thereof forming a portion made of porous material having at least one apex for aerating the solid within the vessel so as to maintain a uniform mass flow rate of the solids and gas mixture discharged to a gasifier." As can be seen in schematic figures 1 and 2, a jacket (13) surrounds the porous material. US 4,941,779 does not mention or suggest the use of flanges nor does it mention or suggest the way in which the porous material has been fixed inside the jacket or hopper.

Although the invention is described hereinafter primarily with reference to pulverised coal, the vessels and discharge devices according to the invention are also suitable for other granular, pulverised, and/or powdered solids, such as resins, catalysts, fly ash, anthracite, brown coal, soot, petroleum coke, and the like.

The invention will now be explained in more detail with reference to the drawings, which depict preferred embodiments of the vessel and discharge device according to the present invention.

Figure 1 shows a vessel according to the present invention.

Figure 2 shows a first preferred embodiment of a discharge device suitable for use in the vessel of Figure 1.

Figure 3 shows a second preferred embodiment of a discharge device suitable for use in the vessel of Figure 1.

It is noted that the drawings are not necessarily to scale and details, which are not necessary for an understanding of the present invention, may have been omitted. As a matter of course, the invention is not limited to the particular embodiments illustrated herein. Further, the drawings do not depict auxiliary equipment, such as pumps, compressors, cleaning devices etc.

Figures 1 and 2 show a vessel 1 for temporarily storing pulverised coal, which vessel 1 comprises a main part, in this case a so-called feed hopper 2, and, at its bottom side, a discharge device 3. The feed hopper 2 comprises, from top to bottom, an inlet 4 provided with a flange 5 for connecting the feed hopper 2 to a feed line (not shown), a dome-shaped top section 6, a circle-cylindrical middle section 7 and a frusto-conical lower section 8, which is provided with a first flange 9. In this particular preferred embodiment, all these components 4-9 are rotationally symmetrical about a central axis A. However, other constructions, e.g. comprising two discharge devices, are also possible.

The discharge device 3 comprises an outer shell 10 provided with a second flange 11, which is connected to the first flange 9 by means of bolts. The outer shell 10 further comprises, at its bottom side, a third flange 12 for connecting the discharge device 3 to a feed line (not shown) of e.g. a gasifier. A metal ring 13 has been welded to the inner wall of the second flange 11, which

ring 13 is provided with e.g. threaded holes or threaded ends distributed evenly over the ring 13 so as to provide a mounting means for an inner shell 14.

5 The inner shell 14 comprises a flanged upper rim 15, which is provided with bolts or nuts secured to, respectively, the threaded holes or threaded ends in the ring 13. A gasket 13' is positioned between the ring 13 and the upper rim 15 so as to render the connection leak tight. The upper rim 15 of the inner shell 14 extends
10 substantially flush with the face of the second flange 11 so as to facilitate (horizontal) removal of the discharge device 3, e.g. for maintenance. The inner shell 14 further comprises a conical section 16 and a lower circle-cylindrical section 17. The wall of the conical
15 section 16 is, for the greater part, made of a porous material, such as sintered stainless steel, sintered ceramic, or woven stainless steel, depending upon operating conditions and type of coal used, and reinforced by means of a metal ring 18. At its lower end,
20 the conical section 16 comprises a solid metal ring 19 with which this section 16 is welded to the circle-cylindrical section 17 of the inner shell 14.

The outer shell 10 further comprises an inlet 10' for feeding pressurised gas into the cavity 20 defined by the
25 outer shell 10 and the inner shell 14. This inlet 10' runs substantially perpendicular to the central axis of the vessel, i.e. horizontally so as to facilitate connection of the discharge device 3 to a feed line.

30 The type of gas, as well as its temperature, pressure and flow rate depend on the operating conditions. In general the aeration serves to overcome the frictional forces between the inner shell 14 and the solids contained therein and of inter-particle friction. For more detailed

information on this subject reference may be had to US 4,941,779 and US 5,129,766 mentioned above..

5 The inner diameter of the circle-cylindrical section 17 corresponds to that of the third flange 12. A metal ring 21 surrounds the said circle-cylindrical section 17 and is welded to the conical inner wall of the outer shell 10. The ring 21 provides a smooth sealing surface for O-rings installed in grooves in the outer wall of the circle-cylindrical section 17. Further, this outer wall is, near its lower rim, also conical thus allowing (cycled) thermal expansion of the inner shell 14 without obstruction and without the building up of debris in the crevices between the said components.

15 The inner wall of the feed hopper 2 is matched to that of the inner shell 14 by means of an annular element 22 welded to the inner wall of the first flange 9. The conicity of the inner wall of this element 22 matches that of the other walls, thus further facilitating a uniform mass flow rate and avoiding bridging of coal or ash.

20 Figure 3 shows a further preferred embodiment of the discharge device 3 according to the present invention, which is especially suitable for operating at higher temperatures e.g. in excess of 200°C. The circle-cylindrical section 17 of the inner shell 14 of this preferred embodiment is provided with a so-called stuffed box assembly 23, which is known in itself. The gasket 23 comprises an annular metal ring 24, which is welded to the inner wall of the third flange 12 and comprises and annular recess containing a seal 25, e.g. a suitable braided fibre seal material, such as a cord or cord-like structure of graphite or ceramic fibres. The seal 25 can be compressed by means of a further ring 26, which

comprises an upwardly extending annular protrusion received in the said recess and which can be tightened by means of threaded ends 27.

5 In view of the above description, it will be clear the first and second flanges are dedicated to the connection of the pressure vessel walls, thus improving leak tightness, and that the inner shell is kept in place by means of a dedicated means, thus facilitating the positioning of the inner shell in the outer shell.

10 Further, all flanges 9, 11, and 12 described above are standard (ANSI) flanges, no individually designed flanges are required.

The invention is not restricted to the above described embodiments which can be varied in a number of ways within the scope of the claims.

C L A I M S

16. 10. 2002

1. A vessel (1) for storing particulate matter⁽⁸⁷⁾, such as pulverised coal or fly ash, comprising a main part (2) and, at its bottom portion, at least one discharge device (3), which comprises a converging outer shell (10) and a permeable, converging inner shell (14) positioned in the outer shell (10), the discharge device (3) being connected to the main part (2) by means of a first flange (9) at or near the lower rim of the bottom portion of the main part (2) and a second flange (11) at or near the upper rim of the outer shell (10), characterised in that the inner shell (14) is secured to the inner wall of the outer shell (10) of the discharge device (3).

2. The vessel (1) of claim 1, wherein the inner shell (14) has been attached to the inner wall of the second flange (11).

3. The vessel (1) of claim 2, wherein the inner wall of the second flange (11) is provided with at least one lug or ring (13) and the inner shell (14) is attached to this lug or ring (13).

4. The vessel (1) of claim 2 or 3, wherein an element (22) for matching the inner wall of the main part (2) of the vessel (1) to the inner wall of the inner shell (14) has been attached to the inner wall of the first flange (9).

5. The vessel (1) according to any one of claims 2-4, wherein the upper rim (15) of the inner shell (14) extends at least substantially flush with the face of the second flange (11).

6. The vessel (1) according any one of the claims 2-5, wherein the connection between the inner shell (14) and the outer shell (10) is sealed by means of a gasket (13').

5 7. The vessel (1) according to the preamble of claim 1, characterised in that the outer shell (10) comprises, at its bottom portion, a third flange (12) and in that the lower portion (17) of the inner shell (14) is cylindrical and positioned in line with the central opening of the
10 third flange (12) and/or extends through this opening.

8. The vessel (1) according to claim 7, wherein a stuffing box assembly (23) is positioned between the cylindrical lower portion (17) of the inner shell (14) and the outer shell (10), which assembly (23) seals the
15 cavity (20) defined by the inner shell (14) and the outer shell (10).

9. The vessel (1) according to any one of the preceding claims, wherein all the said flanges (9,11,12) are standardised flanges.

20 10. The vessel (1) according to any one of the preceding claims, wherein the outer shell (10) is provided with at least one inlet (10') for injecting gas into the cavity (20) defined by the outer shell (10) and the inner shell (14), which inlet (10') runs
25 substantially perpendicular to the central axis (A) of the vessel (1).

11. A discharge device (3) for use in a vessel (1) for storing particulate matter, such as pulverised coal or fly ash, comprising a converging outer shell (10) and a
30 permeable, converging inner shell (14) positioned in the outer shell (10), characterised in that the inner shell (14) has been attached to the inner wall of the outer shell (10).

12. The discharge device (3) of claim 11, comprising a flange (11) forming the upper rim of the outer shell (10), the inner shell (14) being attached to the inner wall of this flange (11).

13. The discharge device (3) of claim 12, wherein the upper rim (15) of the inner shell (14) extends at least substantially flush with the upper rim of the said flange (11).

16. 10. 2002

(87) TS 1318 EPCA B S T R A C T

The invention pertains to a vessel (1) for storing particulate matter, such as pulverised coal or fly ash, comprising a main part (2) and, at its bottom portion, at least one discharge device (3), which comprises a converging outer shell (10) and a permeable, converging inner shell (14) positioned in the outer shell (10), the discharge device (3) being connected to the main part (2) by means of a first flange (9) at or near the lower rim of the bottom portion of the main part (2) and a second flange (11) at or near the upper rim of the outer shell (10). The inner shell (14) is secured to the inner wall of the outer shell (10) of the discharge device (3), preferably to the inner wall of the second flange (11). Thus, the number of gaskets is reduced and/or the positioning of the inner shell becomes less critical.

Figure 2

BS3/TS1318PD

TS 1318 EPL

EPO - DG 1

16. 10. 2002

(87)


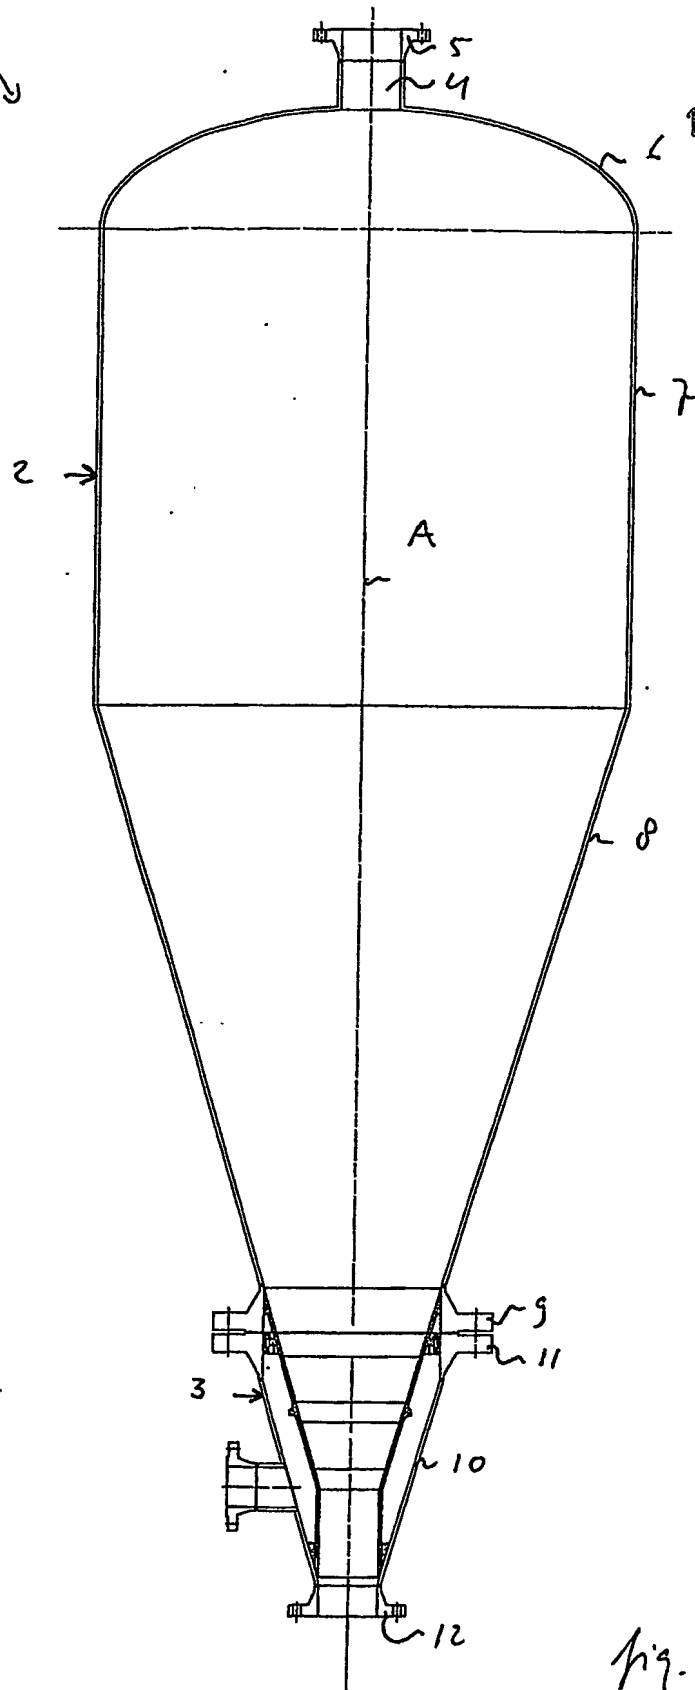


fig. 1

TS 1318 EPC

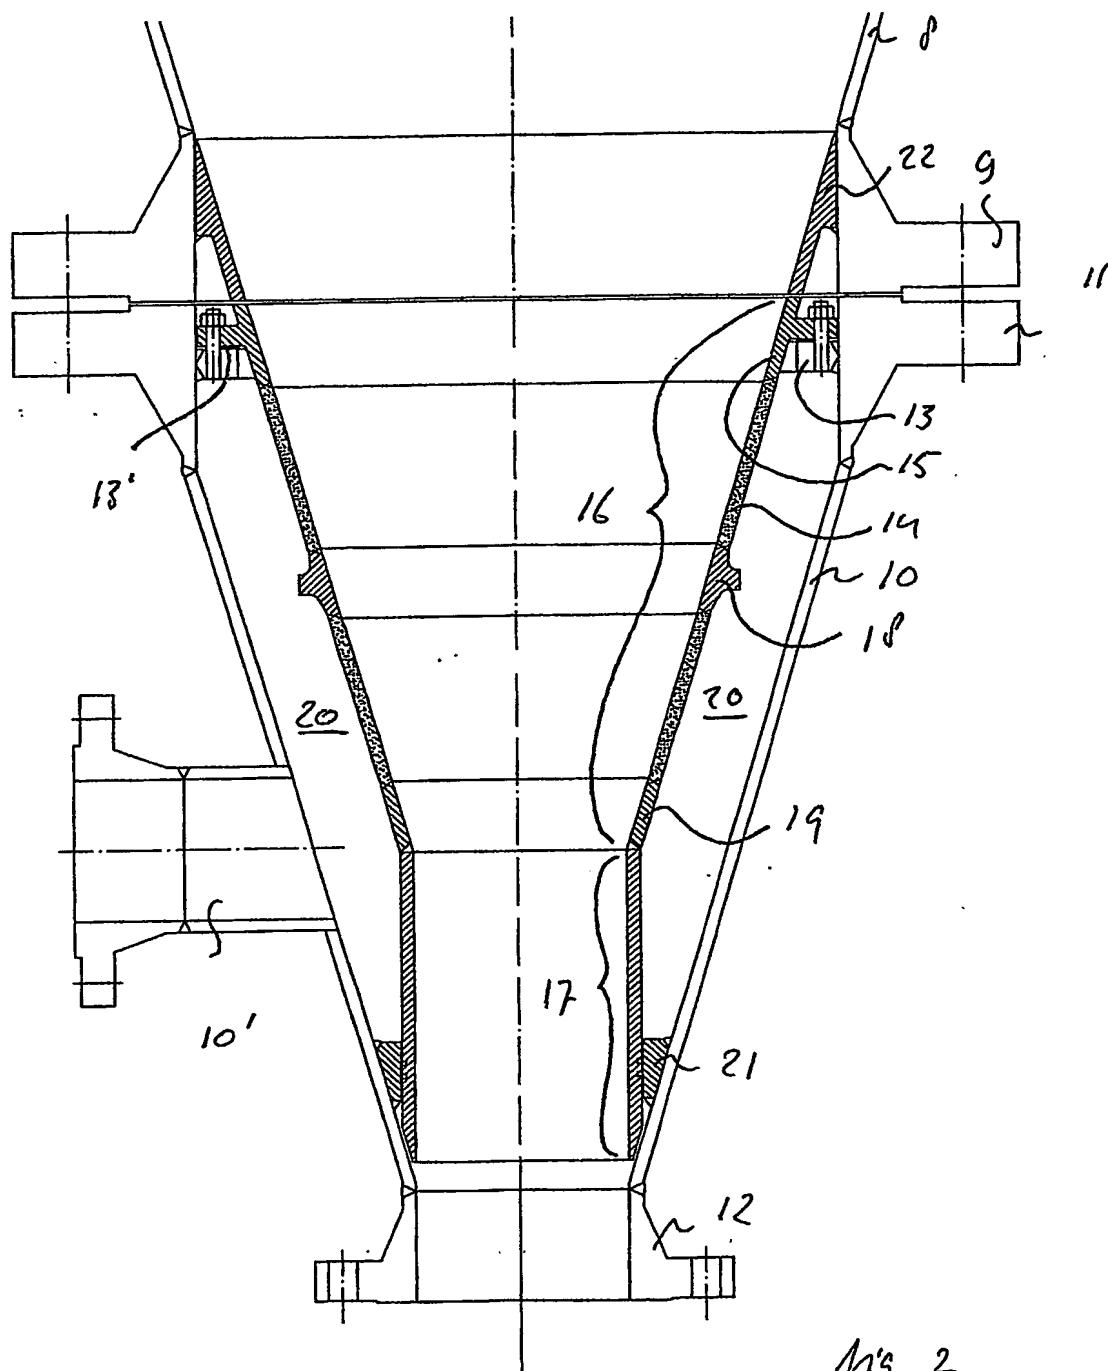

TS 1310 EPC

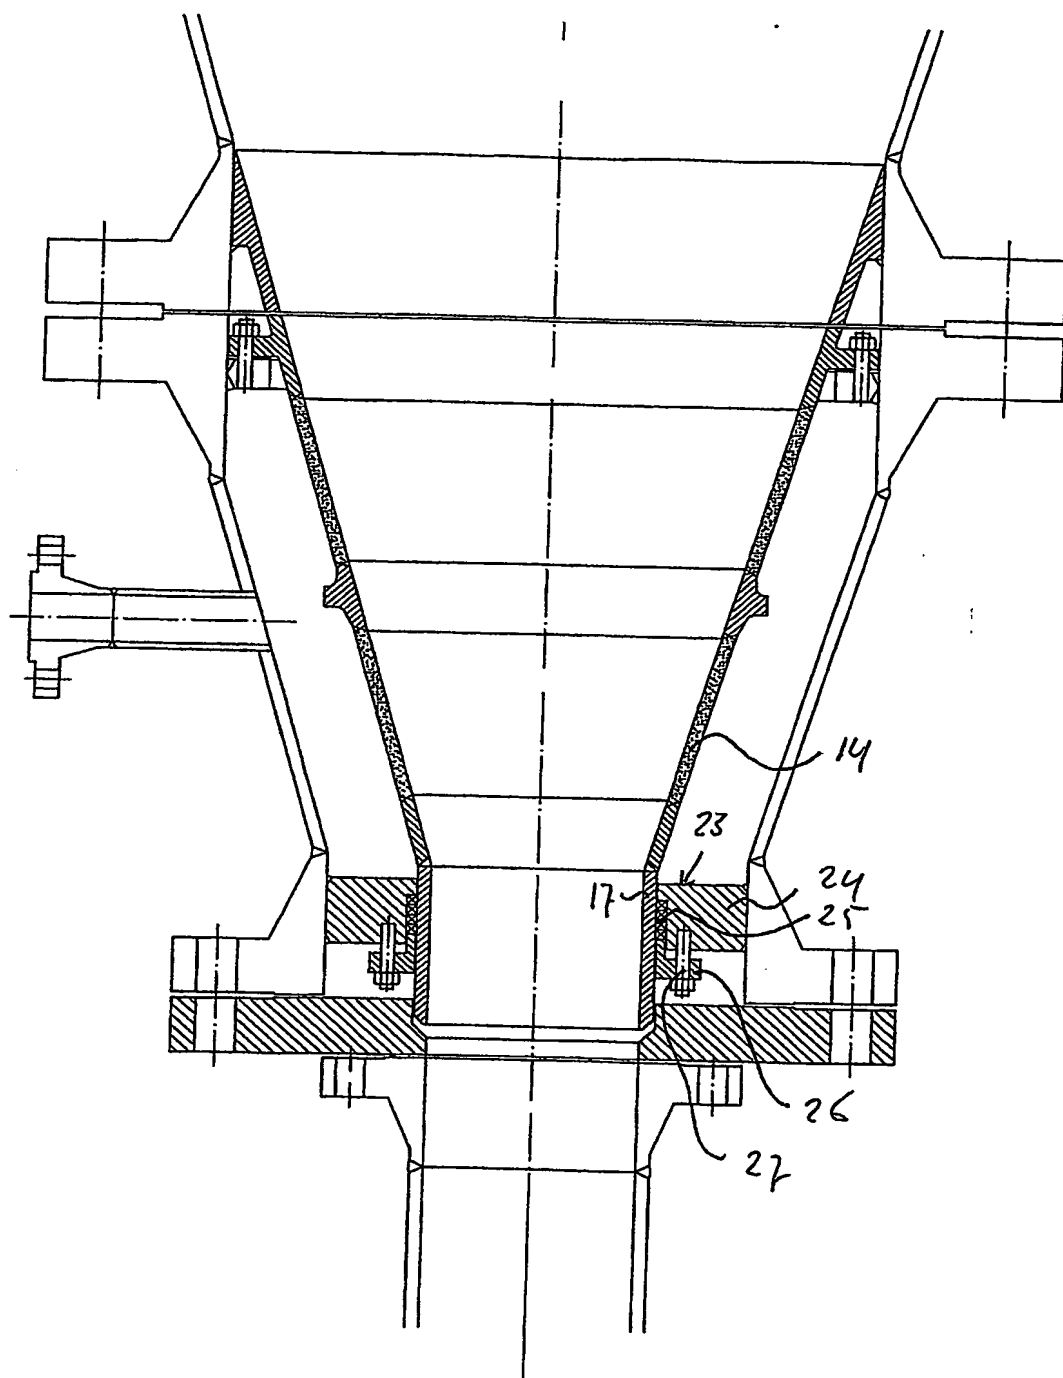


fig. 3

PCT Application
EP0350722

